

BeoVision 7 with Apple Mac mini

Installation &
Setup Guide

Contents

Step 1: What you need

Step 2: Cable Connection

Step 3: Setup

Step 1: What you need




DVI-I to DVI-I
cable




Mini-Jack to RCA
cable


Step 2: Cable Connection

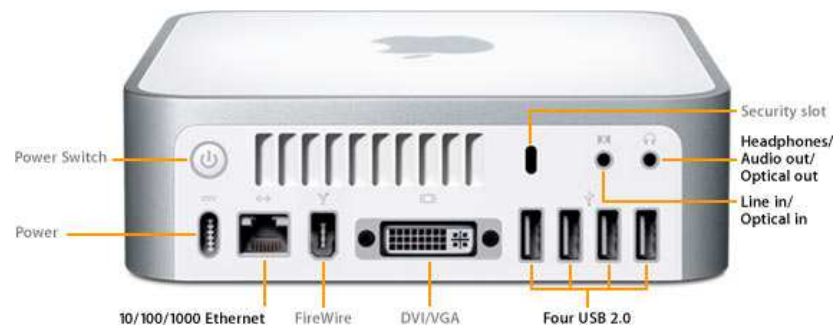

Connect the mini-jack end of the 'Mini-Jack to RCA cable' in the 'Audio out' and the 'Dvi-I to Dvi-I cable' in the 'DVI / VGA' socket on the back of you Apple Mac mini.

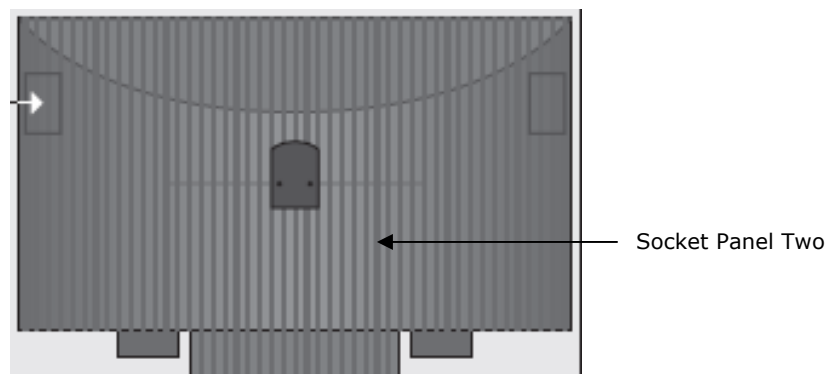

Access the socket panel two on your BeoVision 7.

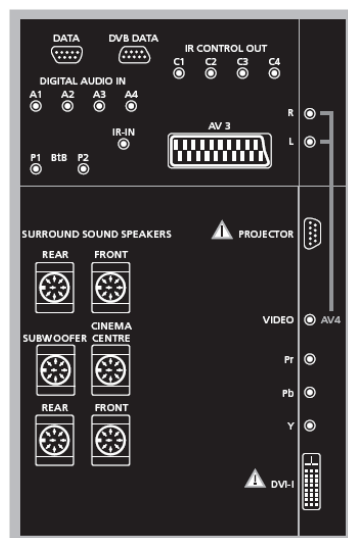


Connect the RCA end of your 'Mini-Jack to RCA cable' into the AV4 R L entry.

Connect the other end of you 'Dvi-I to Dvi-I cable' into the 'DVI-I' socket.

Step 3: Setup

After connecting the cables you must set your BeoVision 7 to use the Apple Mac Mini through the AV4 socket.

Access the BeoVision 7 menu and select **OPTIONS > CONNECTIONS**

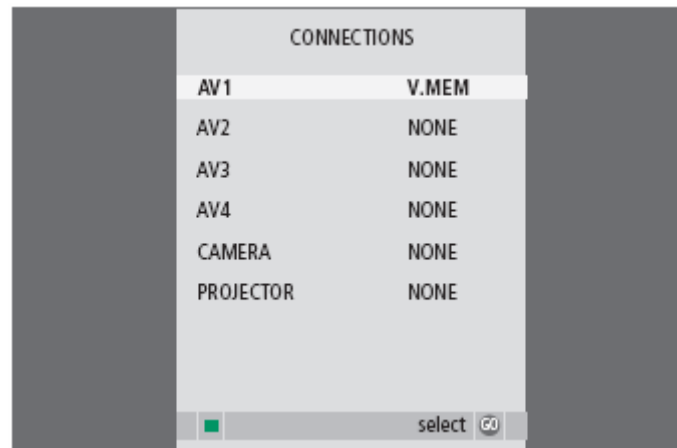

Select AV4 and select PC then exit the menu.

Now the TV will recognize the Apple Mac Mini when you hit PC on your Beo4 remote.